AVEL LINDBERG INC.
NEW MILFORD, CT 06776 USA
www.avellindberg.com
Telephone: 860-355-4711
Fax: 860-354-8597
sales@avellindberg.com

Transformer AV-67530	Issue 2	Date 11/20/00

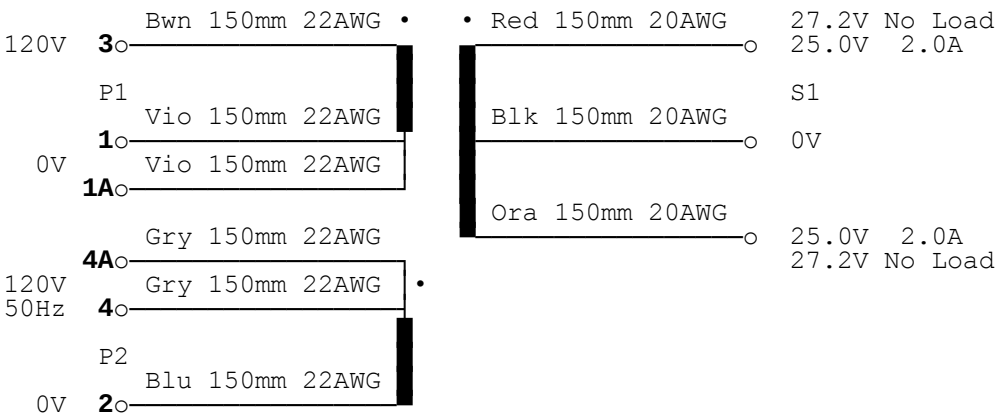

Primary leads from double insulated cable type UL1672

Secondary leads from UL3266 cable

Faston 2.8/0.8mm with insulation cover on primary leads 1/2/3/4, and 6.3/0.8mm on 1A/4A

Faston 6.3/0.8mm with insulation cover on secondary leads

Nominal dimensions/weight: (information only)

diameter	88 mm
height	45 mm
weight	1.2 kg
mounting excluded	

Mounting method: Metal disk 70mm/ 6.5mm hole and two rubber pads, 70 mm

Pri/Sec leads: O °

Comments:
1. Primary resistance: 2x8.0 ohm
2. Secondary resistance: 2x0.68 ohm
3. Calculated temperature rise at 100VA cont load: 45 deg C
4. Small sticker at bottom with text "Made in Sri Lanka"

Label:

Avel Lindberg Inc	cURus Logo
P/N: AV-67530	E115159
Pri: 2x120V, 50/60Hz	
Sec: 2x25V/2A	CE logo